ACO Markant

HexaLine is a recyclable polypropylene trench drain system with a range of innovative features, making installation easier than ever. Cellular construction allows for simple 'push-fit' of channels and accessories.

Suitable for pedestrian/light vehicle traffic applications such as:

- Residential driveways
- Patios
- Walkways
- Basements
- Pools



New push-fit grate locking




Microgrip anti-slip texturing on plastic grates

Residential & Landscape Products



Product Overview

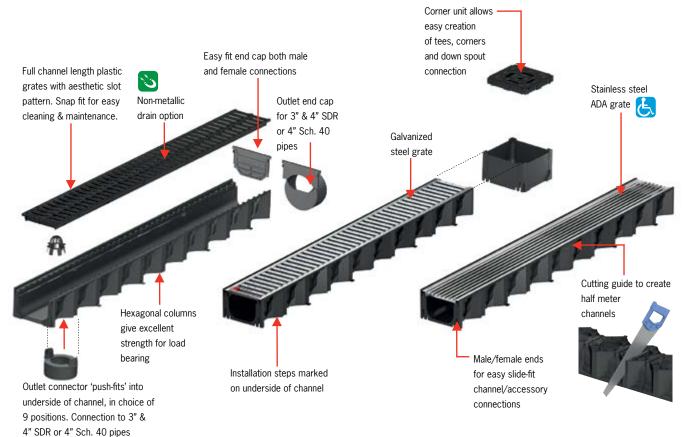




Part Table

	Part No.	Length inches	Width inches	Height inches	Wgt. lbs.
Black channel with black plastic slot grate	319210	39.4	5.1	3.2	3.4
Black channel with galv slot grate	319213	39.4	5.1	3.2	3.4
Black channel with stainless ADA grate	319216	39.4	5.1	3.2	8.6
Accessory pack - 2 end caps, bottom outlet & leaf guard	19303	-		-	0.4
Outlet end cap	319289	-	5.1	3.2	0.1
Corner unit	19280	5.1	5.1	3.2	0.4

Installation Instructions

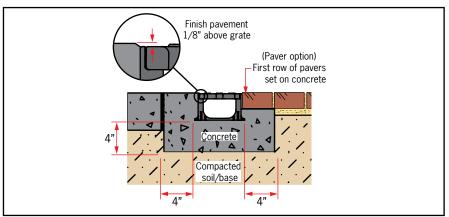

For driveway applications, trench drain MUST be surrounded by 4" of concrete.



Excavate area to accommodate trench drain and 4" concrete surround.



Continue to lay channels working away from outlet, channels slide-fit together.



Rough in 3" or 4" SDR pipe or 4" schedule 40 outlet pipe, compact excavation base and lay 4" deep concrete bed.



Pour 4" concrete around channel sides allowing for pavement detail (see section drawing above).

Accessories



End cap



Bottom outlet adaptor





Grates



Black polyethylene - 0.31" (8mm) slot Intake area per meter grate - 39.4 in²



Intake area per meter grate - 72.5 in²



Stainless steel - 0.21" (6mm) slot Intake area per meter grate - 68.2 in²



Knockout channel base for outlet and start to lay channels from outlet position.



Finish pavement/pavers must be 1/8" higher than the grate.

ACO Polymer Products, Inc.

East Sales Office

P.O. Box 245 Chardon, OH 44024 Tel: (440) 285-7000 Toll free: (800) 543-4764 Fax: (440) 285-7005

Southeast Sales Office

For pedestrian only applications, trench drain can be set directly on well compacted soil.

4211 Pleasant Road Ft. Mill, SC 29708 Tel: (440) 285-7000 Toll free: (800) 543-4764 Fax: (803) 802-1063

West Sales Office

P.O. Box 12067 Casa Grande, AZ 85130 Tel: (520) 421-9988 Toll Free: (888) 490-9552 Fax: (520) 421-9899

Electronic Contact info@acomarkant.com www.acomarkant.com





